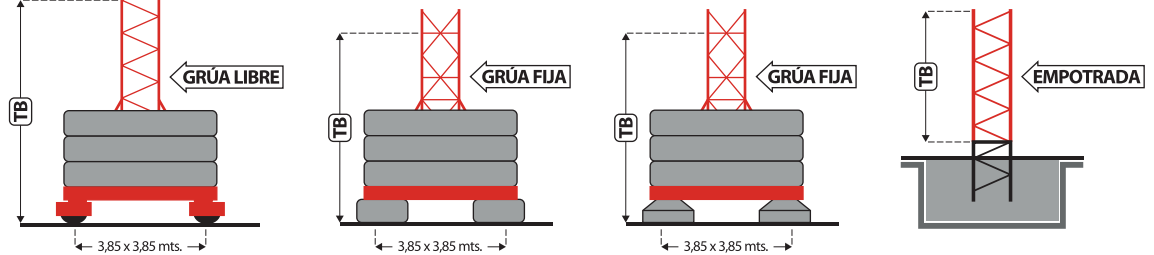







ALCANCES Y CARGAS

| PLUMA | 15 | 18 | 20 | 24 | 28 | 30 | 34 | 36 | 40 | mts. |
|---------|------|------|------|------|------|------|------|------|------|------|
| 40 mts. | 3,00 | 2,88 | 2,55 | 2,06 | 1,58 | 1,45 | 1,23 | 1,15 | 1,10 | t. |
| 36 mts. | 3,00 | 3,00 | 2,85 | 2,30 | 1,77 | 1,63 | 1,39 | 1,30 | | t. |
| 30 mts. | 3,00 | 3,00 | 2,88 | 2,33 | 1,79 | 1,65 | | | | t. |

COMPOSICIONES DE TORRE

| CONFIGURACIÓN DE SALIDA | COMPOSICIONES DE TORRE | | | | | FUJA | LASTRE | EMPOTRADA | |
|-------------------------|------------------------|----------|---------|-----|-----|------|--------|-----------|------|
| | TB | TT1 | TT2 | TT3 | TT4 | TT5 | h/m. | t. | h/m. |
| TB 10.12 | TT 10.12 | TT 10.12 | TT 6.12 | | | | 37,6 | 54,40 | 37,4 |
| TB 10.12 | TT 10.12 | TT 10.12 | TT 3.12 | | | | 35,0 | 47,60 | 34,9 |
| TB 10.12 | TT 10.12 | TT 6.12 | TT 6.12 | | | | 33,8 | 40,80 | 33,6 |
| TB 10.12 | TT 10.12 | TT 10.12 | | | | | 31,2 | 34,00 | 31,1 |
| TB 10.12 | TT 10.12 | TT 6.12 | | | | | 27,4 | 34,00 | 27,3 |
| TB 10.12 | TT 10.12 | TT 3.12 | | | | | 24,9 | 27,20 | 24,7 |
| TB 10.12 | TT 10.12 | | | | | | 21,1 | 27,20 | 20,9 |
| TB 10.12 | TT 6.12 | | | | | | 17,2 | 27,20 | 17,0 |
| TB 10.12 | TT 3.12 | | | | | | 14,7 | 27,20 | 14,6 |
| TB 10.12 | TT 10.12 | TT 10.12 | TT 6.12 | | | | 37,6 | | |



| | | | | | |
|---|---------------------|--------|------------|--|--|
|  | ELEVACIÓN | | mts./min. | t. | FUERA DE SERVICIO OBLIGATORIO GRÚA EN VELETA GRUPO A4 - UNE 58.112  |
| | 10,5/10,5 kw. | I | 4,5 | 0 - 3 | |
| | | II | 21 | 0 - 3 | |
|  | ORIENTACIÓN | r.p.m. | 0,8 V/min. |  380V 50 Hz. | UNE 58.113 ITC MIE-AEM2 ESPECIFICACIÓN .299.81.40.10.C.95 Reservado el derecho a modificaciones sin previo aviso (8/08) |
| | 55 Nm. | 1.350 | | | |
|  | DISTRIBUCIÓN | r.p.m. | mts./min. | | |
| | 1,5 kw. | 1.500 | 40 | | |

